


**TOOLMASTER**

**5MT Live Centre**

**Taiwanese Precision Quality**



## TOOLMASTER 5MT Live Centre



Work Piece Load Graph



Side View



Rear View



Wooden Case

### Description


Toolmaster live centre's are fitted with needle, thrust and ball bearings suitable for medium to high speed lathes with heavy loads.

The shaft is made from alloy steel heat treated to HRC 60° providing high rigidity and high durability.

### Features

- Maximum speed 2000rpm @ 400kg
- Maximum load 1065kg @ 70rpm
- Hardened to HRC 60°
- Made from alloy steel
- Assembled with thrust, needle & ball bearings

### Specifications

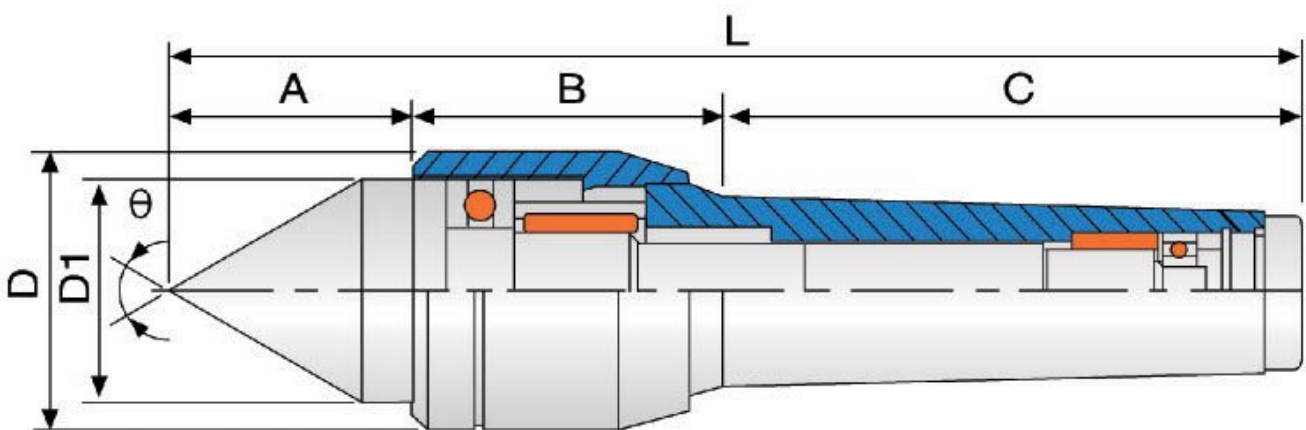

<b>ORDER CODE</b>	C060
<b>Taper (MT)</b>	5MT
<b>Point Type</b>	Standard
<b>Maximum Speed (rpm)</b>	2000

## TOOLMASTER 5MT Live Centre

<b>Maximum Load Capacity (kg)</b>	1065
<b>Angle <math>\theta</math> (deg)</b>	60
<b>A (mm)</b>	54
<b>B (mm)</b>	72
<b>C</b>	136
<b>D</b>	65
<b>D1</b>	52
<b>d</b>	~
<b>E (mm)</b>	~
<b>F (mm)</b>	~
<b>G (mm)</b>	~
<b>L (mm)</b>	262
<b>Nett Weight (kg)</b>	3.7